

## Description




- LED spotlight with motion detector
- 1 LED spot with 10 W
- Suitable for outdoor use
- Automatic lighting control based on presence and brightness
- 180° detection angle at a detection range of 12 m
- Sensor head can be turned by  $\pm 90^\circ$  horizontally and  $90^\circ$  downwards
- Spotlight can be swivelled  $45^\circ$  downwards and  $90^\circ$  upwards
- Area limit via stickers
- Adjustable lux value and switch-off delay
- Settings can be changed without tools
- Manually switching on possible
- Optional purely twilight-dependent control
- Not suitable for dimming application

## Technical data

Operating voltage	230 V AC
Frequency	50 – 60 Hz
Stand-by consumption	~0,5 W
Light measurement	Mixed light measurement
Installation type	Wall installation
Setting range brightness	2 – 200 lx
LED output (lighting current)	750 lm
Colour temperature	5000 - 5600 K
Detection angle	180°
Installation height	2 – 4 m
Light switch-off delay	5 s-10 min
Ambient temperature	-20 °C ... +40 °C
Protection class	I
Type of protection	IP 55


## Connection example

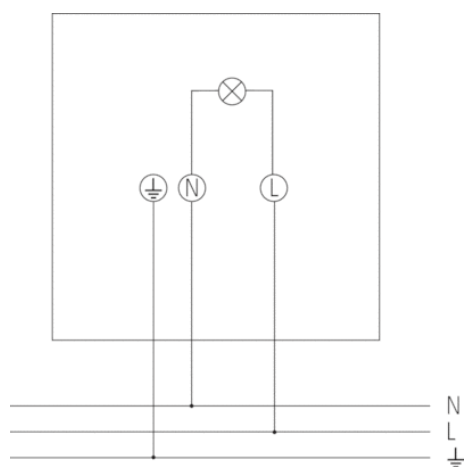

Article number: 1020911

**Detection range**

Mounting height (A)	Head on to (r)	Diagonally (t)
2,5 m	4 m	12 m

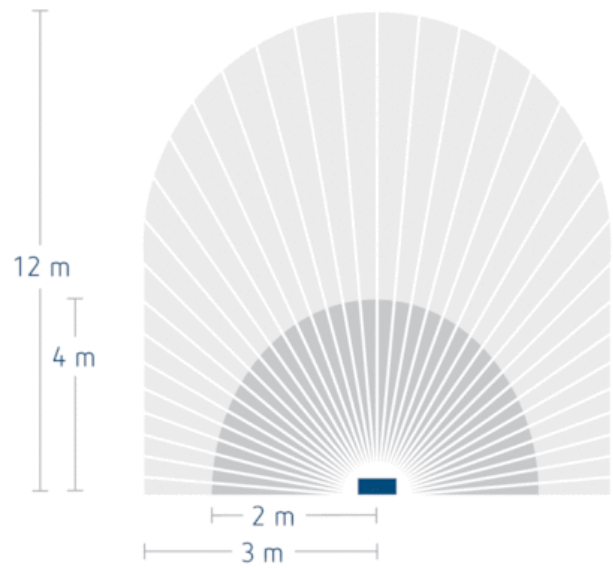

**Scale drawings**

