

Description




- LED spotlight with motion detector
- 1 LED spot with 30 W
- Additional light switch output (relay 230 V AC)
- Suitable for outdoor use
- Automatic lighting control based on presence and brightness
- 180° detection angle at a detection range of 12 m
- Sensor head can be turned by $\pm 90^\circ$ horizontally and 90° downwards
- Spotlight can be swivelled 45° downwards and 90° upwards
- Area limit via stickers
- Adjustable lux value and switch-off delay
- Settings can be changed without tools
- Manually switching on possible
- Optional purely twilight-dependent control
- Not suitable for dimming application

Technical data


Operating voltage	230 V AC
Frequency	50 – 60 Hz
Stand-by consumption	~0,5 W
Light measurement	Mixed light measurement
Installation type	Wall installation
Setting range brightness	2 – 200 lx
LED output (lighting current)	2115 lm
Colour temperature	5000 - 5600 K
Detection angle	180°
Installation height	2 – 4 m
Switching output	Not potential-free (230 V)
Light switch-off delay	5 s-10 min
Incandescent/halogen lamp load	1000 W
Fluorescent lamp load (electronic ballast)	300 W
LED lamp < 2 W	15 W
LED lamp 2-8 W	50 W
LED lamp > 8 W	50 W
Lamps	Incandescent/halogen lamps, fluorescent lamps, Energy saving lamps, LEDs
Ambient temperature	-20 °C ... +40 °C
Protection class	I
Type of protection	IP 55

Connection example

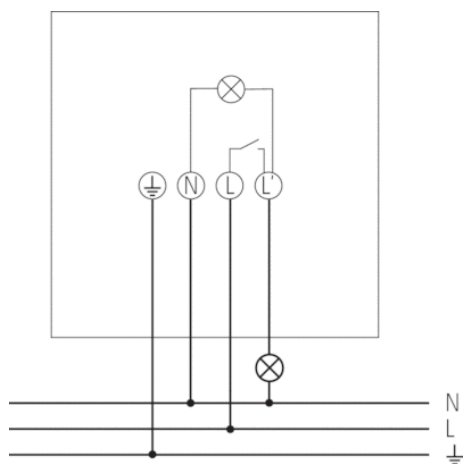

Detection range

Mounting height (A)	Head on to (r)	Diagonally (t)
2,5 m	4 m	12 m

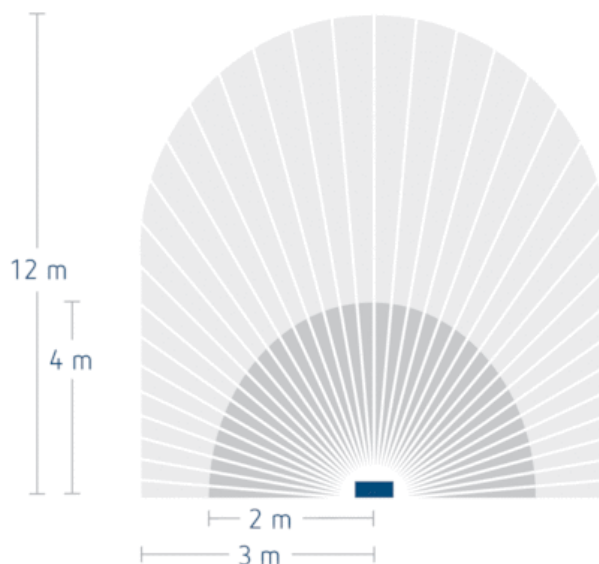

Scale drawings

